



TSC-10DS

TILTING ARBOR SCORING TABLE SAW

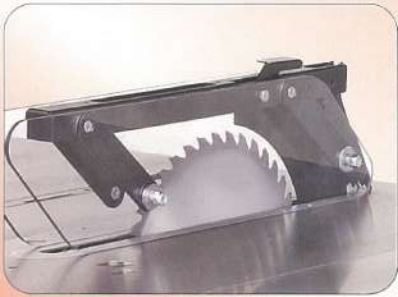

The blade guard can be dismount easily to facilitate maintenance purpose.
The riving knife can perform vertical adjustment with the main sawblade.

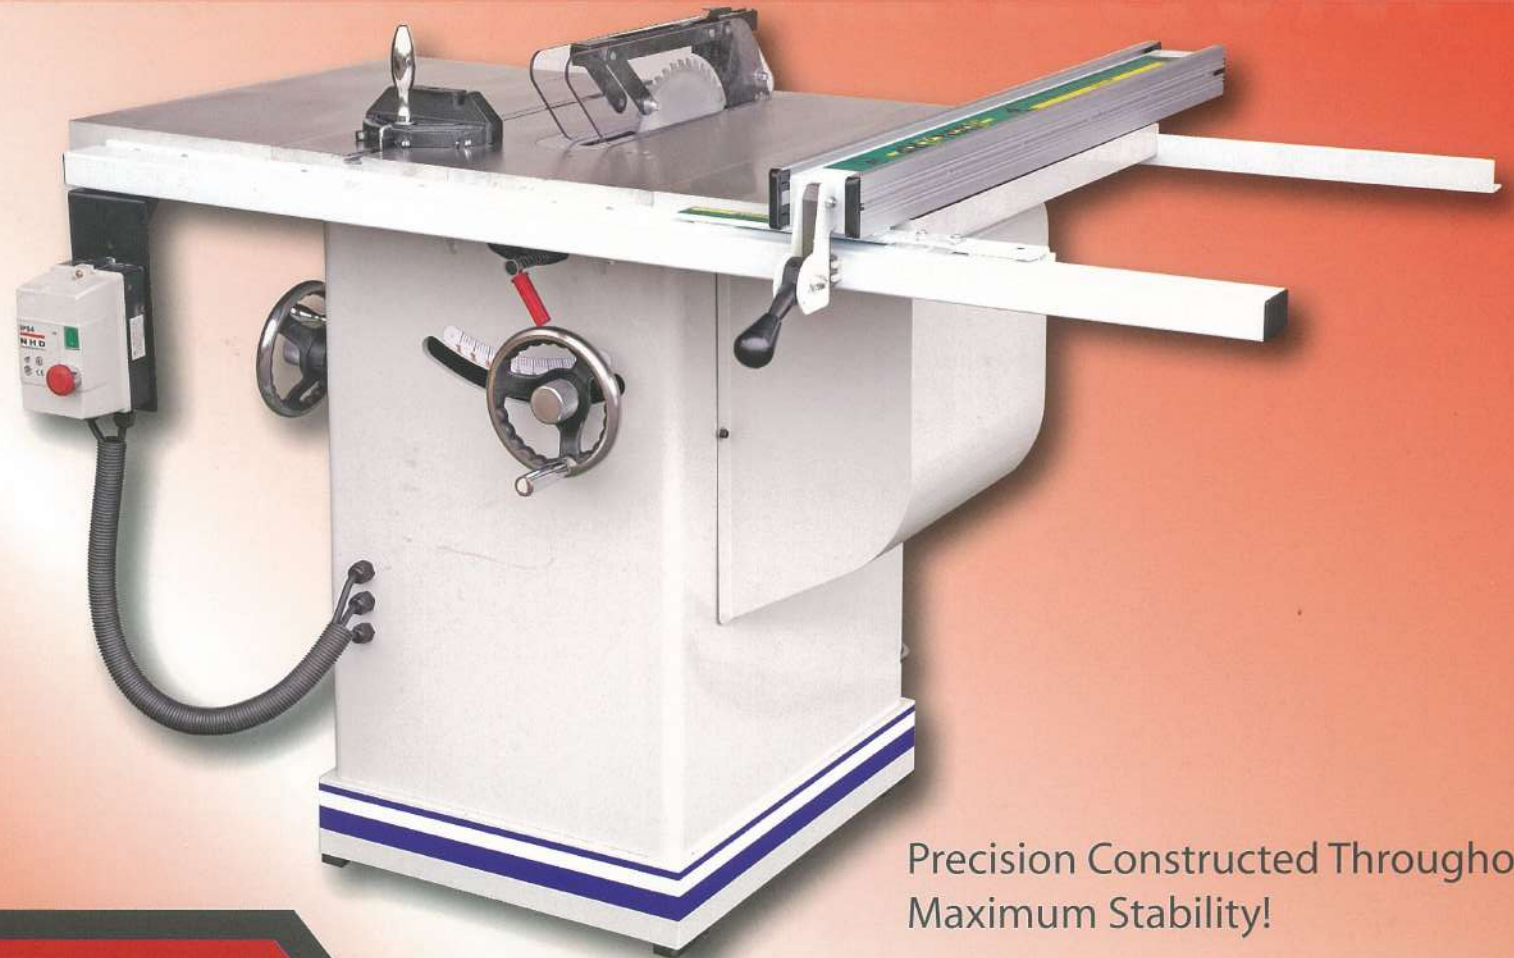


Precision Constructed Throughout!
Maximum Stability!



FEATURES

- Equipped with a 3HP motor for heavy duty cutting.
- Main and scoring saw blades ensure tear-free cutting.
- Ruggedly constructed saw carriage provides maximum cutting stability.
- Heavy, precision-machined trunnion ensures accurate saw tilting.
- Fence locks securely and precisely parallel to the sawblade.
- Durable sawblade guard for operator safety.
- Fitted with precision fence for high accuracy cuts.
- The blade guard can be dismount easily to facilitate maintenance purpose.
- The riving knife can perform vertical adjustment with the main sawblade.

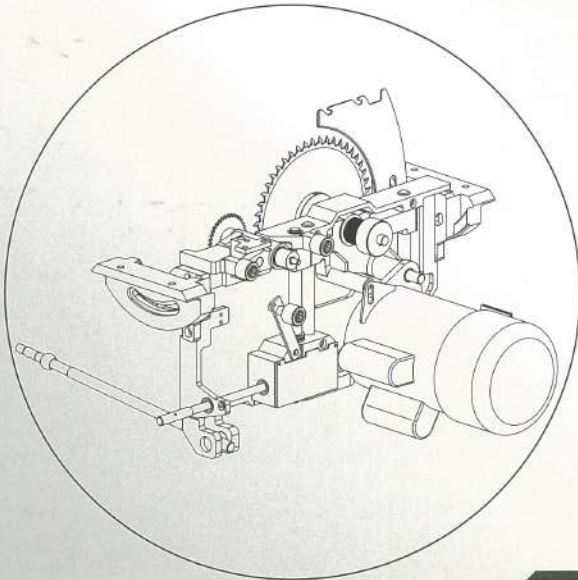

SPECIFICATIONS

MODEL	TSC-10DS
Max. Depth of Cut	79mm
Max. Depth of Cut at 45°	56mm
Distance in front of Blade	215mm
Table Size (LxW)	686x512mm
Extension Wing	686x305mm
Cutting Width on Rip Fence	30"
Motor	3 HP
Main Blade Diameter	ϕ 254mm (10")
Main Blade Arbor Diameter	ϕ 5/8"
Main Blade Speed	5200 r.p.m
Scoring Blade Diameter	ϕ 80mm
Scoring Blade Arbor Diameter	ϕ 20mm
Scoring Blade Speed	10000 r.p.m
N.W.	206 KGS
G.W.	230 KGS
Cuft	20

- All specifications, dimensions and design characteristics shown in this catalog are subject to change without notice.